

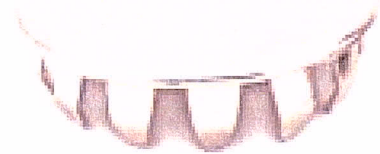


JOHNSON & HOFFMAN

a JADE Corporation



Manufacturer of Precision Metal Stampings & Deep Drawn Components

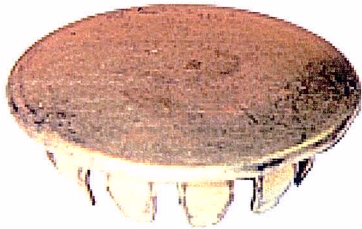

Standard Plugs with Hole Diameters 1-1/4 to 3 (31.8-76.2mm)

		Panel Thickness				Cap Dia.		Cap Height Prong Length					
Hole Dia.		Min		Max								Number Of	J&H Root
In	mm	In	mm	In	mm	In	mm	In	mm	In	mm	Prongs	Part Number
1 1/4	31.8	.062	1.6	.093	2.4	1 7/16	36.5	3/32	2.4	7/32	5.6	12	50726
1 3/8	34.9	.037	0.9	.078	2.0	1 9/16	39.7	3/32	2.4	5/16	7.9	12	51058
1 3/8	35.0	.109	2.8	.141	3.6	1 9/16	39.7	3/32	2.4	5/16	7.9	12	48132
1 1/2	38.1	.038	1.0	.141	3.6	1 41/64	41.7	3/32	2.4	21/64	8.3	12	50834
1 5/8	41.2	.062	1.6	.078	2.0	1 51/64	45.6	1/8	3.2	7/32	5.6	12	50841
1 3/4	44.5	.037	0.9	.094	2.4	1 15/16	49.2	1/8	3.2	7/32	5.6	12	50890
2	50.8	.037	0.9	.187	4.8	2 5/16	58.7	5/32	4.0	3/8	9.5	14	XS48175*
2 3/32	53.2	.046	1.2	.062	1.6	2 9/16	65.1	7/32	5.6	9/32	7.1	14	XS51171*
2 1/4	57.2	.037	0.9	.078	2.0	2 9/16	65.1	7/32	5.6	9/32	7.1	14	XS51056*
2 1/2	63.5	.037	0.9	.062	1.6	2 13/16	71.4	3/32	2.4	1/4	6.4	16	XS51111*
3	76.2	.093	2.4	.156	4.0	3 5/16	84.1	15/64	6.0	13/32	10.3	12	XS48197*

*XS Denotes Assembled Part

Material Prefix

BS	Brass CDA260
HS	CRS1050
SS	CRS1008/1010
NS	Stainless Steel
XS	CRS1008/1010 - Assembled
XH	CRS1050 - Assembled
XX	CRS1008/1010 & CRS1050 Assembled