




- Close unneeded panel holes and electrical knockouts.
- Quick and easy installation.
- Convex, matte finish head tapers to thin edge (Except DP-187).
- Multiple sizes for use in .187” (4,7 mm) to 6.000” (152,4 mm) diameter holes.
- Lock firmly into panel up to .250” (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062” (1,6 mm). Thickness may vary.
- For Snap-In Metric Dome Plugs see page 6-30.

Heyco® Dome Plugs

Mounting Hole Diameter Range: .187” (4,7 mm) to 6.000” (152,4 mm)

MOUNTING HOLE DIAMETER		PART NO.			DESCRIPTION	PART DIMENSIONS			
in.	mm.	Black	White	Colors xx**		A Head Diameter		B Overall Height	
					in.	mm.	in.	mm.	
Single Locking Step for Panel Thickness up to .062” (1,6 mm)									
.187	4,7	2590	2591	2592xx	DP 187*	.25	6,4	.23	5,9
.250	6,4	2607 2603	2608 2604	2609xx 2605xx	DP 250-040† DP 250	.31	7,9	.31	7,9
.312	7,9	2613	2614	2615xx	DP 312	.38	9,5		
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)									
.375	9,5	2617	2618	2619xx	DP 375	.47	11,9	.41	10,3
.437	11,1	2633	2634	2635xx	DP 437	.53	13,5		
.500	12,7	2643	2644	2645xx	DP 500	.56	14,2		
.562	14,3	2653	2654	2655xx	DP 562	.66	16,7		
.625	15,9	2663	2664	2665xx	DP 625	.72	18,2		
.687	17,4	2673	2674	2675xx	DP 687	.78	19,8		
.750	19,1	2683	2684	2685xx	DP 750	.92	23,4		
.812	20,6	2693	2694	2695xx	DP 812	.99	25,1		
.875	22,2	2703	2704	2705xx	DP 875	1.02	25,8	.45	11,5
1.000	25,4	2713	2714	2715xx	DP 1000	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	2723	2724	2725xx	DP 1093	1.22	30,9		
1.187	30,1	2733	2734	2735xx	DP 1187	1.33	33,8	.47	11,9
1.250	31,7	2740	2741	2742xx	DP 1250	1.38	34,9		
1.375	34,9	2753	2754	2755xx	DP 1375	1.50	38,1		
1.500	38,1	2763	2764	2765xx	DP 1500	1.67	42,4		
1.750	44,5	2773	2774	2775xx	DP 1750	1.92	48,7		
2.000	50,8	2783	2784	2785xx	DP 2000	2.17	55,1		
Multiple Locking Steps for Panel Thickness up to .250” (6,4 mm)									
2.093 - 2.125	53,2 - 54,0	2403	2404	***	DP 2.093	2.34	59,9	.75	19,1
2.250	57,2	2411	2412	2413xx	DP 2.25	2.48	63,0	.75	19,1
2.500	63,5	2790	2791	2792xx	DP 2.5	2.71	68,8		
3.000	76,2	2455	2456	2457xx	DP 3.0	3.16	80,3	.74	18,8
3.375	85,7	2482	2483	***	DP 3.375	3.66	92,9	.75	19,1
3.500	88,9	2464	2465	2466xx	DP 3.5	3.66	92,9		
4.000	101,6	2473	2474	2475xx	DP 4.0	4.17	105,8	.71	18,0
5.000	127,0	2451	2452	***	DP 5.0	5.24	133,0	.75	19,1
6.000	152,4	2453	2454	***	DP 6.0	6.22	157,9	.78	19,8



Standard colors black and white. Consult Heyco for other colors (see below)

*Convex, glossy finish head.

** xx indicates that, following the color match process, Heyco adds a two letter suffix to the Root Part No. shown. This suffix will identify your particular CUSTOM Color selection. Consult Heyco for molded nylon color chips for accurate matching. For details as well as information regarding our Stock Colors, see page 6-53.

***Consult Heyco for root Part No.

† Max panel thickness is .040” (1,0 mm)

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E51579 Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)




Heyco® Thick Panel Dome Plugs

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.000" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
		Black	White		A		B			
in.	mm.				Head Diameter		Overall Height			
					in.	mm.	in.	mm.		
Single Locking Step for Panel Thickness up to .172" (4,4 mm)										
.375	9,5	2624	2625	DPT 375	.47	11,9	.41	10,3		
Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)										
.500	12,7	3004	3005	DPT 500	.57	14,5	.56	14,3		
.625	15,9	3006	3007	DPT 625 *	.73	18,5	.52	13,2		
.750	19,1	3008	3009	DPT 750 *	.92	23,4				
.812	19,6	2667	2668	DPT 812-500**	1.02	25,9	.88	22,4		
.875	22,2	3044	3045	DPT 875	1.02	25,9	.56	14,3		
1.000	25,4	3046	3047	DPT 1000	1.20	30,5				
1.093 - 1.125	27,8 - 28,6	3018	3019	DPT 1093	1.22	31,0				
1.187	30,1	3100	3101	DPT 1187	1.31	33,3				
1.250	31,8	3102	3103	DPT 1250	1.38	35,1				
1.375	34,9	3106	3107	DPT 1375	1.50	38,1				
1.500	38,1	3048	3049	DPT 1500	1.67	42,4				
1.750	44,5	3027	3028	DPT 1750	1.91	48,5				
2.000	50,8	3050	3051	DPT 2000	2.17	55,1			.56	14,2

- For use in panels thicker than .125" (3,2 mm).
- Close unneeded panel holes and electrical knock-outs.
- Locking fingers snap into holes with fingertip pressure for quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.000" (50,8 mm) diameter holes for panel thickness up to .250" (6,4 mm).
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.

Standard color black. Consult Heyco for other colors.
 *Single locking step for panel thickness up to .250" (6,4 mm).
 **For Panel Thickness from .20" (5,1 mm) to .50" (12,7 mm). AKA Whistle-free Plug.



Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 (Thick Panel Dome Plugs only) Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs



Heyco® Shorty Plugs

Single Locking Step for Panel Thickness up to: .062" (1,6 mm)

Mounting Hole Diameter Range: .187" (4,7 mm) to 1.093" (27,8 mm)


- **Limited intrusion .125" (3,2 mm) inside the panel.**
- Quick and easy installation.
- Multiple sizes for mounting holes from .187" (4,7 mm) to 1.093" (27,8 mm).
- Approximate Head Thickness: .062" (1,6 mm).
- For Shorty Window Plugs see page 6-36.

MOUNTING HOLE DIAMETER		PART NO.			DESCRIPTION	PART DIMENSIONS					
		Black	White	Colors xx		A		B			
in.	mm.				Head Diameter		Overall Height				
					in.	mm.	in.	mm.			
.187	4,7	2590	2591	2592xx	DP 187†	.25	6,4	.23	5,9		
.218	5,5	1654	1655	1656xx	SP 218	.28	7,1	.25	6,4		
.281	7,1	1660	1661	1662xx	SP 281	.34	8,7				
NEW! .307	7,8	1657	1658	1659xx	SP 307	.37	9,4				
.312	7,9	1678	1679	1680xx	SP 312	.38	9,5				
.343	8,7	1663	1664	1665xx	SP 343	.41	10,3				
.375	9,5	1681	1682	1683xx	SP 375	.47	11,9				
NEW! .390	9,9	1708	1709	1710xx	SP 390						
.406	10,3	1666	1667	1668xx	SP 406	.53	13,5				
.437	11,1	1684	1685	1686xx	SP 437						
.468	11,9	1669	1670	1671xx	SP 468	.56	14,3				
.500	12,7	1687	1688	1689xx	SP 500						
.531	13,5	1672	1673	1674xx	SP 531					.59	15,1
.593	15,1	1675	1676	1677xx	SP 593					.69	17,5
.625	15,9	1690	1691	1692xx	SP 625					.72	18,3
NEW! .687	17,4	1719	1720	1721xx	SP 687					.79	20,1
.750	19,0	1693	1694	1695xx	SP 750					.84	21,4
.781	19,8	1696	1697	1698xx	SP 781			.89	22,6		
.875	22,2	1699	1700	1701xx	SP 875			.97	24,6		
1.000	25,4	1702	1703	1704xx	SP 1000			1.20	30,5		
1.093	27,8	1705	1706	1707xx	SP 1093	1.22	31,0				

Standard colors black or white. Consult Heyco for other colors (see below).

† Convex, glossy finish head.

xx indicates that, following the color match process, Heyco adds a two letter suffix to the Root Part No. shown. This suffix will identify your particular CUSTOM Color selection. Consult Heyco for molded nylon color chips for accurate matching. For details as well as information regarding our Stock Colors, see page 6-53.

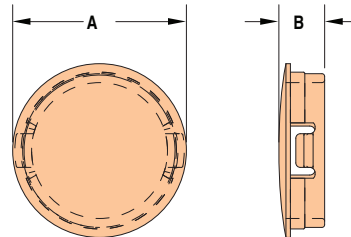

Quick Specs

Material
Certifications

Nylon 6/6



Recognized under the Component Program of Underwriters' Laboratories File E51579



Certified by the Canadian Standards Association File 8919

Flammability Rating
Temperature Range

94V-2

-40°F (-40°C) to 221°F (105°C)



Heyco® Thin Panel Dome Plugs

Multiple Locking Steps for Panels as Thin as .020" (0,5 mm)
 Mounting Hole Diameter Range: .218" (5,5 mm) to .875" (22,2 mm)*

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Thickness at Locking Finger Steps		Mounting Hole Diameter*		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	

Three Steps to .048" (1,2 mm) thick

.020 .032 .048	0,5 0,8 1,2	.218	5,5	1654N	1655N	SP 218N	.28	7,1	.25	6,4
		.250	6,4	2607N	2608N	SP 250N	.31	7,9		
		.281	7,1	1660N	1661N	SP 281N	.34	8,7		
		.312	7,9	1678N	1679N	SP 312N	.38	9,5		
		.343	8,7	1663N	1664N	SP 343N	.41	10,3		
		.375	9,5	1681N	1682N	SP 375N	.47	11,9		

Five Steps to .064" (1,6 mm) thick


.020 .032 .040 .048 .064	0,5 0,8 1,0 1,2 1,6	.500	12,7	1687N	1688N	SP 500N	.56	14,3	.25	6,4
		.512	13,0	1716N	1717N	SP 512N				
		.625	15,9	1690N	1691N	SP 625N				
		.750	19,1	1693N	1694N	SP 750N				
		.750	19,1	1693N	1694N	SP 750N				
		.875	22,2	1699N	1700N	SP 875N				

Standard color black. Consult Heyco for other colors.

*Consult Heyco for other Mounting Hole Diameters. Our Axcell Rapid Response Team is ready to meet your requirements.

- Provide a flush, finished fit in panels as thin as .020" (0,5 mm).
- Quick and easy installation.
- Multiple sizes for mounting holes from .218" (5,5 mm) to .875" (22,2 mm).
- Consult Heyco for other Thin Panel Mounting Hole Diameters.
- Lock firmly in panels up to .064" (1,6 mm) thick.

NEW!

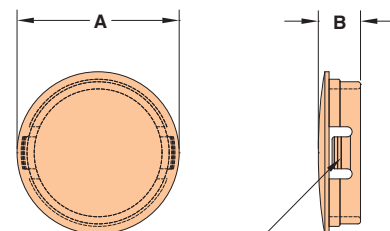

MULTIPLE FINGER STEPS FOR TIGHT PANEL FIT

Heyco® Thin Panel versus Shorty Plugs

Choose from Multiple Locking Steps, for the Fit and Finish Your Application Requires

Mounting Hole Diameter	PANEL DIMENSIONS					PART NO.		DESCRIPTION
	Maximum Thickness Locking Steps inches/millimeters					Black	White	
	.020 0,5	.032 0,8	.040 1,0	.048 1,2	.064 1,6			
.218 5,5	x	x		x		1654N	1655N	SP 218N
.250 6,4	x	x		x	x	1654	1655	SP 218
.250 6,4	x	x		x		2607N	2608N	SP 250N
.281 7,1	x	x		x		1660N	1661N	SP 281N
.281 7,1	x	x		x	x	1660	1661	SP 281
.312 7,9	x	x		x		1678N	1679N	SP 312N
.312 7,9	x	x		x	x	1678	1679	SP 312
.343 8,7	x	x		x		1663N	1664N	SP 343N
.343 8,7	x	x		x	x	1663	1664	SP 343
.375 9,5	x	x		x		1681N	1682N	SP 375N
.375 9,5	x	x		x	x	1681	1682	SP 375
.500 12,7	x	x	x	x	x	1687N	1688N	SP 500N
.500 12,7	x	x	x	x	x	1687	1688	SP 500
.625 12,7	x	x	x	x	x	1690N	1691N	SP 625N
.625 12,7	x	x	x	x	x	1690	1691	SP 625
.750 19,1	x	x	x	x	x	1693N	1694N	SP 750N
.750 19,1	x	x	x	x	x	1693	1694	SP 750
.875 22,2	x	x	x	x	x	1699N	1700N	SP 875N
.875 22,2	x	x	x	x	x	1699	1700	SP 875

Material Certifications

Nylon 6/6
 Recognized under the Component Program of Underwriters' Laboratories, File E51579
 Certified by Canadian Standards Association, File 8919

Flammability Rating
 Temperature Range

94V-2
 -40°F (-40°C) to 221°F (105°C)

Quick Specs



Heyco® Halogen and Phosphorus-Free 94V-0 Hole Plugs

Heat Stabilized • Self Extinguishing • Nontoxic • UV Resistant
 Mounting Hole Diameter Range: .187" (4,7 mm) to 2.000" (50,8 mm)

- **Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases.** Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Lock firmly into panel up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Multiple sizes for use in .187" (4,7 mm) to 2.000" (50,8 mm) diameter holes. Consult Heyco for larger sizes.

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Black	A Head Diameter		B Overall Height
				in.	mm.	in.	mm.

Single Locking Step for Panel Thickness up to .062" (1,6 mm)

.187	4,7	2593	HFP 187*	.25	6,4	.24	6,1
.250	6,4	2606	HFP 250	.31	7,9	.31	7,9
.312	7,9	2616	HFP 312	.38	9,5		

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)


.375	9,5	2623	HFP 375	.47	11,9	.41	10,3		
.437	11,1	2636	HFP 437	.53	13,5				
.500	12,7	2646	HFP 500	.58	14,7				
.625	15,9	2666	HFP 625	.72	18,2				
.750	19,1	2686	HFP 750	.92	23,4				
.875	22,2	2706	HFP 875	1.02	25,8	.45	11,5		
1.000	25,4	2716	HFP 1000	1.20	30,6				
1.093 - 1.125	27,8 - 28,6	2729	HFP 1093	1.22	30,9				
1.250	31,7	2749	HFP 1250	1.38	34,9				
1.375	34,9	2759	HFP 1375	1.50	38,1				
1.500	38,1	2769	HFP 1500	1.69	42,8				
1.750	44,5	2779	HFP 1750	1.92	48,7				
2.000	50,8	2789	HFP 2000	2.17	55,1				
								.47	11,9

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)


ALL NEW PRODUCTS

.500	12,7	3004F	HFPT 500	.58	14,7	.56	14,3
.625	15,9	3006F	HFPT 625 *	.73	18,5	.52	13,2
.750	19,1	3008F	HFPT 750 *	.91	23,1	.56	14,3
.875	22,2	3044F	HFPT 875	1.02	25,8		
1.000	25,4	3046F	HFPT 1000	1.20	30,6		
1.093-1.125	27,8-28,6	3018F	HFPT 1093	1.22	30,9		
1.250	31,7	3102F	HFPT 1250	1.38	34,9		
1.375	34,9	3106F	HFPT 1375	1.50	38,1		
1.500	38,1	3048F	HFPT 1500	1.67	42,4		
1.750	44,5	3027F	HFPT 1750	1.91	48,4		
2.000	50,8	3050F	HFPT 2000	2.17	55,1		

Standard color black.
 *Convex, glossy finish head.

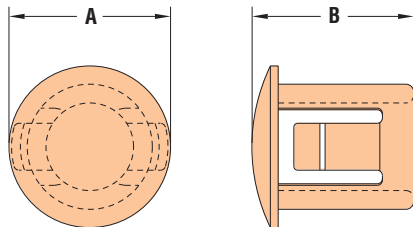

SINGLE PANEL THICKNESS DESIGN

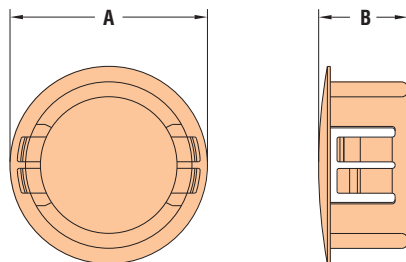

MULTIPLE PANEL THICKNESS DESIGN

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E51579
	Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-0
Temperature Range	-40°F (-40°C) to 221°F (105°C)




Heyco® Extra Dome Plugs

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
		Black	White		A Head Diameter		B Overall Height		C Inside Height	
in.	mm.				in.	mm.	in.	mm.	in.	mm.
3.0	76,2	2442	2443	EDP 3.0	3.22	81,8	1.37	34,8	1.26	32,0
5.0	127,0	2444	2445	EDP 5.0	5.22	132,6	1.41	35,8	1.31	33,3

Standard colors black. Consult Heyco for other colors.

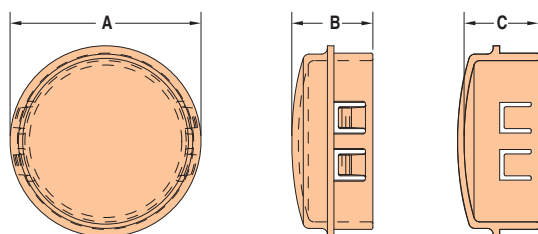


Heyco® Snap-In Metric Dome Plugs

Multiple Locking Steps for Panel Thickness up to 4,1 mm (.162")

Mounting Hole Diameter Range: 13,0 mm (.512") to 34,2 mm (1.347")

	MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS			
	mm.	in.	Black	White		A Head Diameter		B Overall Height	
						mm.	in.	mm.	in.
NEW!	13,0	.512	2203	2204	MDP 13	14,2	.56		
	16,0	.630	2128	2130	MDP 16	18,5	.73	10,3	.406
	20,0	.787	2131	2132	MDP 20	22,6	.89		
NEW!	22,0	.866	2205	2206	MDP 22	25,9	1.02		
	25,0	.984	2133	2134	MDP 25	29,8	1.17		
NEW!	28,0	1.102	2215	2216	MDP 28	31,2	1.23	11,5	.453
	32,0	1.260	2135	2136	MDP 32	35,3	1.38		
NEW!	34,2	1.347	2218	2219	MDP 34	38,1	1.50		

Standard color black. Consult Heyco for other colors.



- Extra dome height for additional clearance under the top.
- Consult Heyco for additional sizes.
- Lock firmly into panels up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Not UL Recognized.



- Multiple sizes for use in **13,0 mm (.512") to 34,2 mm (1.347") diameter holes**. For other metric sizes, consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Lock firmly into panel up to 4,1 mm (.162") thick.
- Approximate Head Thickness: 1,6 mm (.062").
- For **Threaded Metric Plugs**, see page 6-44.
- For our complete range of Dome Plugs, see page 6-25.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579 (MDP's only) Certified by Canadian Standards Association, File 8919 (MDP's only)
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs